

# Assembly Instructions for the Ampendage Amp Stand

Congratulations on your purchase of the Ampendage guitar amplifier stand. These instructions will guide you through the stand assembly. Should you experience any difficulties, please contact us at:

support@ampendage.com.

Before assembling this unit, remove all parts from the carton and compare them with the parts list provided below.



## Parts List:


### Hardware:

- a) 8 – 2” screws
- b) 2 – 1” screws
- c) 4 – ¾” screws
- d) 4 washers
- e) 4 rubber feet
- f) 4 rubber bumpers
- g) 1 Allan key



### Unit Pieces:

- A. 1 top
- B. 1 base
- C. 2 legs
- D. 1 handle

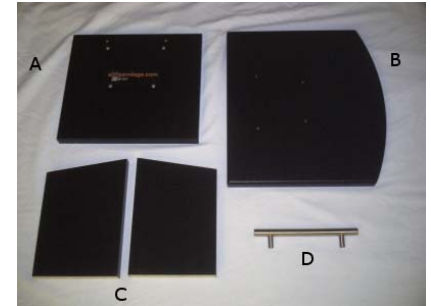

### Amp Stand Assembly:

Important Note: Although some parts of the stand can be assembled in random order, **it is most important that the handle is attached first.** Use all of the hardware provided to ensure stability and support.

Do not use power tools to assemble your stand as they may strip or damage parts. The Allan Key (g) is provided for assembly purposes. You will also require a Philips screwdriver (not provided).

We recommend assembling the unit on a padded surface to prevent panels from being scratched.


### Step 1

Attach handle – using the 1” screws provided (b), attach handle (D) to the top surface of the top (A) of the stand using a Philips screwdriver.



## Step 2


Attach feet – using the ¾” screws (c) and washers (d), attach the 4 rubber feet (e) to the underside of the base (B) in the predrilled holes using a Philips screw driver.

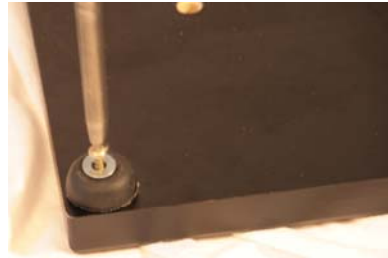

Note: It is important that the washers are used to ensure the screws do not drill through the rubber feet.

## Step 3

Attach legs – using 4 of the 2” screws (a) attached the flat edge of the legs (C) to the top side of the base (B) of the unit. Note: the legs should be positioned so that the top edge of the legs slope downward toward the back of the stand.

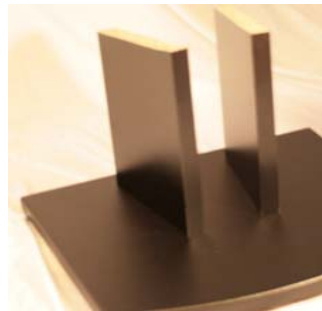


## Step 4

Attach top – using the 4 remaining 2” screws (a) attach the sloped edge of the legs (C) to the underside of the top of the stand (A).



## Final Step

Attach bumpers – remove the 4 stick-on bumpers (f) from the package and press into place on the top side of the unit. They are provided to prevent the amp from slipping on the surface of the stand. Bumpers should be placed as close to the edge as possible for maximum stability.



Your finished stand should look like this:



## Important Usage Information

The ampendage amp stand is engineered to hold all sizes of combination guitar amps. This product is designed for stability; however, we cannot guarantee its use for unusually tall (over 30 inches) or oddly shaped amps. It is designed for amps with dimensions of approximately 1 unit depth x 2 units height x 2 units width. It is intended for indoor use on flat surfaces only. Always carefully center the amp on the stand to ensure maximum stability.

For more information please visit our web site at [ampendage.com](http://ampendage.com).

Thank you for purchasing your ampendage amplifier stand!